


Sea Eagle Swim Ladder Assembly Instructions

What it Does

Sea Eagle® Swim Ladder attaches to the bow chamber of the FastCat14™. It easily folds up on the deck for motoring and can be quickly deployed for re-boarding from the water.



Folded Ladder

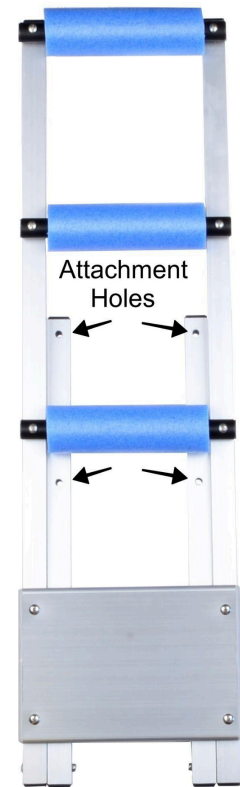

What Is Included


Sea Eagle Swim Ladder*

Hardware:

4 - low-profile knobs

4 - 1/4 x 20 x 2" truss head bolts

4 - M8 x 30 flat washers

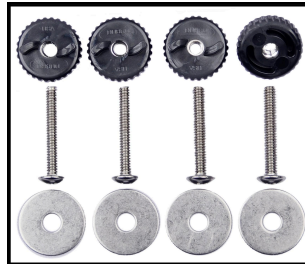

*Knob and foam pad color may vary from the examples shown here.

Attach to the Boat

The ladder utilizes four D-ring attachment points on the bow chamber.


Place a washer on each bolt and have the low-profile knobs close at hand.

Stand in front of the boat and fold the D-rings outward. Insert the bolts through the D-rings so they point upward.



Pick up the folded ladder. The aluminum plate must be closest to you, not the rungs.

Line up the bolts with the holes in the attachment tubes. Lower the ladder, working the bolts through the holes in the tubes. As they come through, loosely thread a knob on.

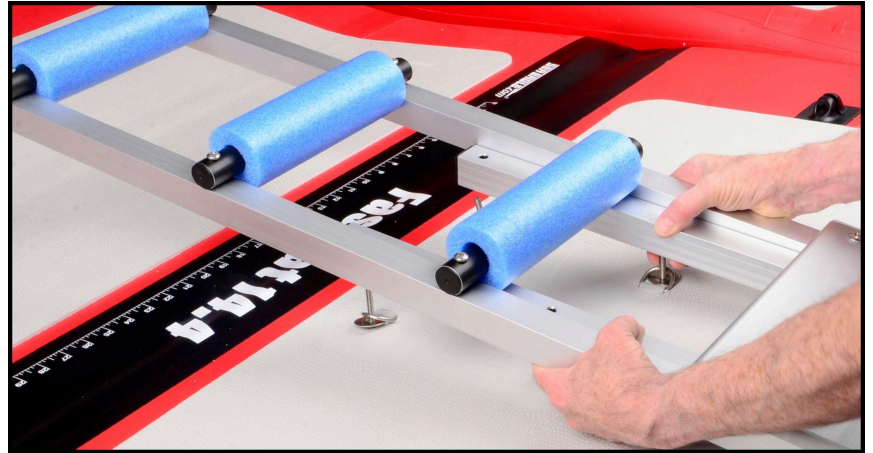

To Aid In Aligning Bolts:


- Push the ladder around as necessary to aid alignment
- Use your fingers to move the bolts around
- Press on the edge of the washer to move the end of the bolt around

Note: Unfolding the ladder and attempting to thread the bolts through the legs individually is more difficult than placing the folded ladder onto the bolts.

⚠ Caution: Avoid pinch-point injury to fingers. Do not place fingers between the attachment tubes and the rails when folding the ladder.

Secure the Ladder

Thread the low-profile knobs onto the bolts. Tighten the knobs after all have been threaded on.

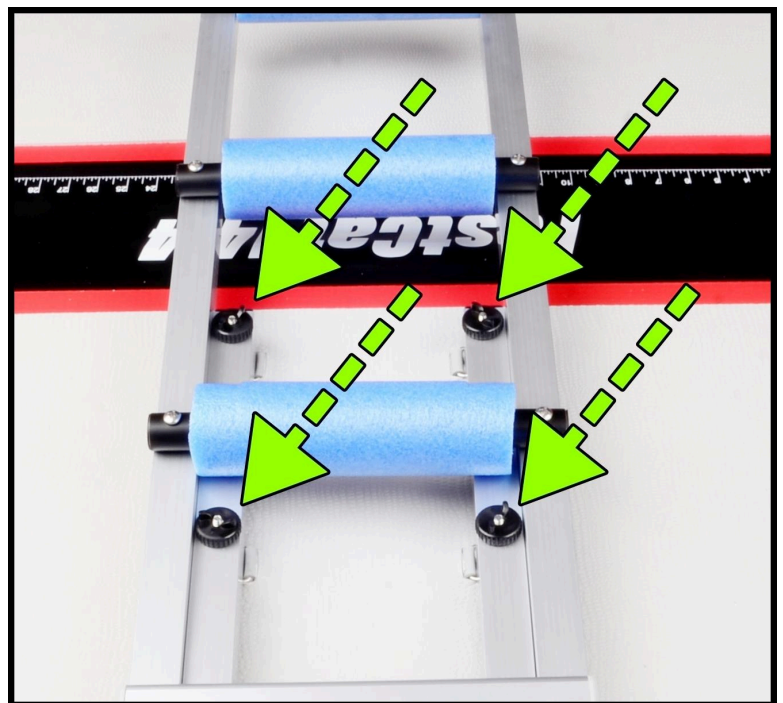

How to Use It

Lift the ladder by a rung or side rail to deploy it.

Face ladder when climbing up or down.

⚠ Caution: Ladder should be free-floating. Do not allow ladder to push against the bottom, especially in wavy conditions. The force of the boat could cause damage.

Quick Check

Check the knobs before each use. Tighten if loose.

Stow It Before Moving the Boat

Swing the ladder back up onto the deck before moving the boat.



WARNING

AVOID INJURY or DAMAGE

Install Swim Ladder only on a Sea Eagle Boat following the directions in the instruction manual. Failure to secure the ladder could result in difficulty re-boarding or injury.

Before Use: Check knobs and tighten if needed. To avoid damage to boat and ladder, the ladder must be folded on deck when boat is moving.

Keep fingers clear of pinch points when folding, unfolding and installing ladder.

Avoid Overloading Ladder:

- One person on ladder at a time.
- No jumping or diving from ladder.
- Keep weight on the center of the rungs.

Face ladder when using to avoid slip and fall.

Avoid collapse. Do not use ladder for boarding to or from a dock.

Do not use ladder on land. Ladder must be secured to boat for use.

DANGER

Propeller Strike Hazard: Never use ladder when engine is running. Serious injury or death could result.

Maximum Load Weight: 275 lbs (125 kg).

Be Careful, Be Safe!

Please check out these warnings for safe use.

In addition to the instructions, use experience and common sense, and use the ladder safely.

Questions?

If you have any questions, please call Sea Eagle at 800-748-8066 or email staff@seaeagle.com for help.