

# SEA EAGLE.com<sup>®</sup>



## FastCat

Instruction & Owner's Manual

**Sea Eagle Boats Inc.**  
19 N. Columbia Street, Suite 1  
Port Jefferson, NY 11777  
1-800-748-8066

**January 2021**

## **Congratulations on purchasing a Sea Eagle!**

With over 50 years of experience in designing, selling and using these quality inflatables, we're confident that you are going to love your Sea Eagle and we're ready to proudly stand behind them.

### **Sea Eagle Warranty**

All Sea Eagle products come standard with a 3 year warranty against manufacturing defects. The warranty begins the date that your product is delivered.

***Warranty does not cover damage from use, neglect, or abuse such as but not limited to abrasions, punctures and tears.***

See complete warranty details at [SeaEagle.com/Warranty](http://SeaEagle.com/Warranty).

If you receive a damaged item, please call the shipping carrier to report the issue. Do not return damaged merchandise until it has been inspected by the carrier. Sea Eagle will be notified by the carrier when they have completed their inspection and if necessary, Sea Eagle will arrange for the repair or replacement of damaged merchandise.

### **Decals, Stickers & Registration**

Always contact your state boating authorities for information on boating registration and regulations. Most states require you to register your boat if you are using a motor. ***\*The Sea Eagle FastCat is rated for use with up to a 6 hp motor.***

Upon registration it may be required to provide the Manufacturer's Statement of Origin. Purchases made through an authorized dealer or reseller may require for you to contact them directly in order to obtain this. You may be charged your own state sales tax if you were not charged sales tax at the time of purchase.

Registered boats generally require for the registration number to be applied to the boat. We do not recommend the use of decals or stickers as they tend to crack and peel over time with the repeated inflation and deflation of your Sea Eagle. Instead we suggest applying these numbers to a small piece of hard plastic or marine plywood and hanging it from your boat like a license plate if permitted by your state. Another method is to apply the numbers to the hull using either PVC based paint or permanent marker.

### **Contact Us**

Unlike many other companies today we pride ourselves on answering the phone and helping you with any concerns, questions or special ordering needs that you may have! Feel free to give us a call at **1-800-748-8066** and we will be happy to talk with you! Our business hours are Monday to Friday from 9AM to 5PM, EST.

**Sea Eagle Boats Inc.**  
19 N. Columbia Street, Suite 1  
Port Jefferson, NY 11777  
1-800-748-8066  
[Staff@SeaEagle.com](mailto:Staff@SeaEagle.com)

# SAFETY

In a manual of this type it is impossible to give adequate space to the topic of water safety. For further information on boating safety, visit [USCGBoating.org](http://USCGBoating.org) or enroll in a water safety course given by a local provider.

As a safety reminder, each Sea Eagle has a safety summary we call Boating Safety Basics printed on it. Please follow these suggestions and use good boating safety practices. In addition to the basics, we suggest you have a reasonable swimming ability and know that it is safer to go boating with a buddy. If you go alone, tell someone your float plan as described below. When possible, plan your trip so you go upwind on the way out and downwind on the way back.

## Boating Safety Tips

- Always wear a USCG approved PFD (life vest) at all times while on the water.
- Be aware of your local boating rules and regulations and abide by them accordingly.
- Check inflation levels each time before you go out and inflate your boat for a full 24 hours before undertaking long trips.
- DO NOT allow children to use your Sea Eagle unsupervised.
- DO NOT consume alcohol while boating or operating a boat while under the influence of alcohol or drugs.
- DO NOT drag your Sea Eagle over pavement or gravel if it can be avoided.
- DO NOT exceed the certified maximum capacities of this boat under any circumstance.
- DO NOT go boating alone.
- DO NOT use compressors, CO<sub>2</sub> or compressed air for inflation, only use Sea Eagle recommended pumps.
- DO NOT use your Sea Eagle Boat as a personal flotation device as they are not rated for that use.
- DO NOT sleep inside of your Sea Eagle while on the water.
- Bring a fully charged cell phone or other emergency contact device in a waterproof bag.
- Always tell someone of your boating plans.

## Safety Equipment & Important Safety Items

Water conditions will determine the type of safety equipment needed. At a minimum have a PFD (personal flotation device) and a whistle for each passenger. PFDs are required by law in most places.

**Drinking Water & Snacks:** Boating is a physical activity that can deplete your reserves. Have enough water and snacks to prevent dehydration and loss of stamina. Bring enough water for all passengers. Know the warning signs of dehydration and heat sickness such as dizziness and shaking.

**Extra Clothes/Layers:** Avoid deadly hypothermia. Water conducts heat faster than air, so go prepared with weather proof clothing especially if the water is cold. Use a “dry bag” to store extra clothing inside so they’re not damp when needed. Wear a wetsuit or drysuit when warranted.

**First Aid-Kit:** Contents of the kit may vary depending on your preferences but be sure to include items that match the hazards you are likely to encounter. A waterproof container is recommended.

**Manual Pump/Repair Kit:** Although our boats are both durable and rugged, it may be possible that you need to make a repair while on the water in which case you’ll need the repair kit and a manual pump to re-inflate the boat. If this is your first repair, you may also want to bring this instruction manual with you.

**Sun/Rain Protection:** A hat can protect both your face and head from the rain or sun. Sunscreen will help prevent serious damage to your skin from the sun and the sun’s reflection from the water. Reapply sunscreen as needed.

**Whistle:** Having a whistle readily available to you in case of emergency is a great way to attract the attention of others if assistance is needed.

**Float Plan:** Similar to a pilot’s Flight Plan, consider having a Float Plan ([www.floatplancentral.org](http://www.floatplancentral.org)). Always tell someone where you are going to be boating and what time you plan to return. Keep a cell phone in a waterproof container that will float if it falls in the water.

# SAFETY

Boating is challenging and inherently dangerous. Follow safe boating practices. Be physically fit enough to meet the challenges, prepared for any weather conditions that might be anticipated, and follow the safety basics. Protect all personal items in a waterproof bag. Secure all accessories to the boat. The FastCat is large and stable for a boat. Keep weight (such as batteries, motors and gear) close to the center as possible to minimize tippiness.

## Motor Safety and Reboarding



**Danger:** Spinning propellers and carbon monoxide produced by gas engines can cause serious injury or death.

- Do not approach a running motor from the water.
- If you or your passenger falls overboard, **do not attempt to reboard in the motor mount area.**
- Turn engine off at a safe distance when approaching a swimmer in the water.
- Install propeller guard on gas motors

If the motor is equipped with an engine safety cutoff (kill) switch, the driver must attach the cable to themselves, either around the thigh or wrist, or to clothing (preferably a life jacket). In addition:

- Test regularly to ensure that the engine stops when the kill cord is pulled from the switch.
- Make sure that the kill cord is in good condition.
- Always attach the kill cord securely to the driver, ideally before the engine is started, but certainly before the boat is put in gear.
- Stop the engine before transferring the kill cord to another driver.
- Wireless kill switches are available and each passenger can wear one.

## Safety Training

Completion of an approved boating safety course is recommended for all operators of powered boats, and is required for junior operators in many jurisdictions.

## Battery Features and Safety for Trolling Motors


- Positive (+) red wire connects to positive (+) battery terminal. Black wire to negative terminal (-).
- To determine a battery's charge life, divide the amp hour rating by the motor amperage. For example, a battery rated at 60 Ah connected to a 30 amp motor will last approximately two hours at full speed. Note: this number will vary depending on conditions.
- Running the battery all the way down will shorten its life. Not more than 85% discharge is recommended. Multiply the above by 0.85 to get best run time.
- Charge battery after each use. Lead acid batteries like to be kept charged.
- Exposure to excessive heat will shorten battery life.
- Cold Cranking Amps (CCA) and starting power are not a consideration for trolling.
- 12v automobile, lawn tractor and motorcycle batteries can be used but are not designed for deep discharge and will wear out more quickly.
- A battery box like the Minn Kota Power Center is recommended, especially around aluminum paddle shafts which could cause an electrical short. It has a built-in circuit breaker. It will keep bare skin and clothes protected if any acid leaks from the battery.
- A circuit breaker or fuse is required by the Coast Guard. Check the trolling motor manual for the size circuit interrupter needed. Circuit interrupters are intended to protect against reverse polarity, shorts, and will protect the motor from overheating if the propeller gets bound up with weeds, anchor line or fishing line.
- In the event the motor wires are placed on the wrong terminals, reversing the polarity, the wires heat up and can melt the insulation and cut through the boat.
- A 12v battery charger will be needed. Chargers are widely available and prices range widely. Inexpensive chargers are usually sufficient.
- Choose gel cell over wet cell. Gel will be less likely to leak acid if the case seal is broken.
- Lithium or AGM batteries can be a good choice even if they are more expensive. They are generally lighter, discharge evenly for longer run times, and charge evenly for a longer life.
- For some operators, two small batteries are better than one large, heavy one. A small backup battery can be helpful too.

More technical and safety information is available from battery and motor manufacturer's, boating organizations and publications.

# CONSTRUCTION & WORKING PRESSURE

## Drop Stitch Construction:

The boat is made of drop-stitch material. Dozens of threads per square inch hold the top and bottom layers together and keep the flat-boat shape. Without drop stitch, inflatables are tube shaped.

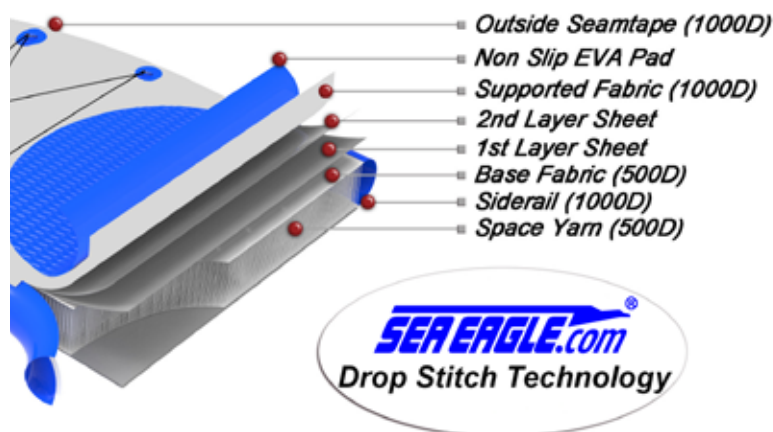

## Working Pressure:

In this instruction manual, we use the term “working pressure” to describe inflation pressure in pounds per square inch (PSI). By this we mean, the air pressure needed to make a boat rigid enough for use. All three chambers of the FastCat12 are drop-stitch material with a maximum pressure of 15 psi (1 bar). The recommended working pressure is 10 to 14 psi. How much pressure is needed can depend on how much weight is in the boat and environmental factors such as wave height.

When using the manual pump, the air pressure a person can force into the boat is related to how much the person weighs. For example, a 150 lb. individual may find it difficult to put more than 12 psi into the boat and impossible to reach 15 psi, but will find the boat to be rigid enough for use at 12 psi. Additional pressure may not improve performance nor will it make the boat more buoyant.



**Caution:** Do not use the FastCat12 below 7 psi. Below this pressure the boat will be too flexible.



**Danger:** Over pressurization could lead to catastrophic failure and sudden release of compressed air. Serious injury to persons nearby could result. Maximum recommended pressure is 15 psi (1 bar). **DO NOT** use air compressors that are designed for other uses such as tire inflation. They can easily over-inflate & cause harm to you and your Sea Eagle that uses much lower pressure.

As air is compressed it heats up and expands. Warm air occupies more volume than cool air. If the water is cold, warm air in the boat will shrink and some rigidity will be lost. Allow a few minutes for the boat to cool off in the water, and if needed, top it off with enough pump strokes to bring it back up to pressure. The boat could also appear to lose pressure overnight if the nighttime temperature drops significantly below the daytime temperature.

Air pressure within the boat may increase on a very hot day. It is best to keep the boat in the water to dissipate heat, but the boat should be able to accept the additional pressure without failure. Refer to the care section of this manual for protection and storage information.

The FastCat12 holds a lot of air! Inflating with the manual pump is hard work and takes approximately 20 minutes with breaks to inflate the boat. The exercise from inflating the boat may be valuable, but often boating time is limited and it is better to get out on the water as quickly as possible. An electric pump is recommended for achieving that goal. If the FastCat12 is to be inflated once a season or kept on inflated on a trailer, a hand pump may be sufficient to maintain working pressure.



**Caution:** Inflating the boat manually is physically demanding. Pace yourself. If you feel uncomfortable, stop and rest, do not proceed if you are having a health issue.

# OPERATING YOUR SEA EAGLE

**BEFORE & DURING USE:** Avoid damage. Do not drag your Sea Eagle over abrasive surfaces like asphalt parking lots, or concrete boat ramp, whether the boat is in its bag or inflated. Carry or wheel your Sea Eagle from the car to the setup point, and then to the water when assembled.

Rocks and sticks usually will not damage a Sea Eagle but be alert for partially hidden or submerged hazards like metal signs, shopping carts, and other debris especially during periods of low water. Be careful of docks and pilings which may have exposed nails, screws, and marine life such as barnacles and oysters.

**FISH SPINES:** Many species of fish have sharp spines than can cause small punctures in the FastCat. Do not allow fighting fish to bump the boat. Use a net to lift fish out of water when possible.

**PADDLING:** Most of the power should come from your torso. Your arms contribute, but too much reliance on your arms will cause you to tire quickly. For good balance, keep your head up and eyes focused on the horizon. Start paddling gently and smoothly. As the boat picks up speed it will maintain a truer heading. If you dig in hard at first you will create more yaw. Course corrections can be made by easing up or bearing down on one side or the other. Gentle turns can be made by sweeping water behind the boat. Braking will allow you to maneuver sharp bends in a stream, for example, but kills forward speed.

In a crosswind, paddle more on the downwind (leeward) side of the boat to keep on a straight course. Paddling on the upwind side will cause the boat to turn down wind.

**SELF BAILING:** The FastCat12 is designed to be self draining. Water coming over the bow or sides will drain under the transom.

## Capacity Ratings and Dimensions:

**Persons:** 2 Persons

**Total Weight Capacity:** 1200 lbs

**Maximum Engine Rating:** 6 HP, Short Shaft Recommended

**Chambers:** 4

**Length:** 12' 10"

**Boat Weight:** 113 lbs

**Width:** 4' 8"





The FastCat12 has four floatation chambers; two side chambers and two floor chambers. The boat will stay afloat and can be paddled or motored when loaded to capacity with the main chamber deflated.




**WARNING:** This product can expose you to chemicals including DEHP (Di(2-ethylhexyl)phthalate), which is known to the state of California to cause Cancer, Birth Defects or other reproductive harm.

For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Warning Labels:

 <b>DANGER</b>	
	<p><b>Carbon Monoxide (CO)</b> gas can cause brain damage or death.</p> <p>Engine exhaust contains odorless and colorless Carbon Monoxide gas.</p> <p>Carbon Monoxide gas will be around the back of the boat when engine is running.</p> <p>Move to fresh air, if you feel nausea, headache, dizziness or drowsiness.</p>

 <b>WARNING</b>
<p><b>ROTATING PROPELLER MAY CAUSE SERIOUS INJURY OR DEATH.</b></p> <p><b>SHUT OFF ENGINE WHEN NEAR PERSONS IN THE WATER</b></p>

Safety Instructions/Boating Safety Basics are glued to the inside of the left chamber mid-ship.

**Invasive Species Control:** If the boat is to be used in multiple waterways, fully drain the boat, rinse and dry between uses. Flush the channel between the side chambers and floor chamber with a disinfectant such as a mild bleach solution. Call or check website for local fish and wildlife authority for more information on how to prevent the spread of invasive plants and animals. Your Sea Eagle is resistant to most stains and most chemicals.



## FastCat | SETUP: TOOLS FOR 1 TIME ASSEMBLY



### Tools for One-Time Assembly

A #2 Phillips head screwdriver or drill with #2 Phillips head bit and a 7/16" wrench or adjustable wrench are needed for attaching the rod holder bases and the swivel seats to their aluminum benches.



Screw the hose onto the pump.

Begin in the double action mode for fast fill.

Switch to single action when handle becomes too hard to lift.



### Using the Recessed Valves:

Remove the cap to access the valve stem.

Note: Maximum pressure is 15 psi (pounds per square inch), working pressure is 10-15 psi.



### Using the Double Action Hand Pump:

The pump hose has a Recessed Valve Adapter at one end. When ready to inflate the boat, push adapter firmly into valve and twist clockwise to lock in.

If hose untwists itself from the valve, twist once counterclockwise and re-insert.

## FastCat | ASSEMBLY & INFLATION



### Inflate:

Press and turn the stem counterclockwise so it can pop UP. When the stem is up, the valve is closed and will hold air.

### Deflate:

To let air escape for deflation, press and turn the stem clockwise until locked open.



Locate an area large enough to safely unfold the FastCat. Check that the area is free of hazards that could injure you or damage the boat.



### Using the Double Action Hand Pump:

In the double action mode the pump inflates on the up and down strokes. In the single action mode, the handle comes up more easily, allowing the user to push hard on the down stroke.



With valve stem in the up position, insert adapter, push down firmly and twist clockwise.



Pressure gauge will not register until chamber begins to get pressurized.

Pump until working pressure of between 14-15 PSI is reached. Do not exceed 15 PSI (1 bar).

Inner numbers in red show pressure in PSI.



**WARNING:**

Air compressors that are designed for other uses like tire inflation (usually over 30 psi) can easily over-inflate and cause harm to your Sea Eagle that uses a much lower pressure. For this reason, we recommend using only Sea Eagle manual or electric pumps.



**Motor Mount Transom Board**  
Insert transom board into motor mount grommets. Plate with ring faces forward.



**Transom Attachment Hardware**  
4 - M8 x 100 Hex Head Screws  
8 - 1" Flat Washers  
4 - Threaded Knobs



Start with floor grommets. Adjust transom board to align the holes.



Look through the grommet hole to check alignment with hole in transom. Pull or push bottom of side chamber until holes line up.

A wrench is recommended for holding the bolt heads while tightening the threaded knob.



Insert screws with washer through the side chamber grommets and transom holes



**Seat Bench Installation**  
FastCat12 can take two aluminum crossbenches. Each bench can take one seat release and swivel seat.




## FastCat | ASSEMBLY & INFLATION



Locate aluminum cross bench(es), quick disconnect seat mount (s), seat(s) and hardware.

Hardware per bench  
4 - M6 x 50 screws  
4 - 5/16" x 1 1/4" washers  
4 - knobs

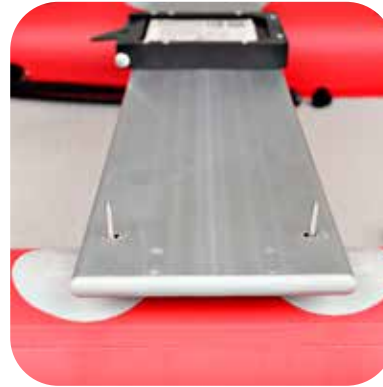

Lay one end of bench over the screws, so screws come up through the holes in bench.



Locate the hardware for the seat mount:

4 - 1 1/4" Phil Flat screws  
4 - 1" flat washers  
4 - Nylock nuts

Insert screws through the holes in the seat mount. Place seat mount over the holes in the crossbench.




Partially thread bench knobs onto bolts. Leave these loose until bolts are inserted through opposite end of bench.



Place one washer and one nut on each screw. Tighten screw with #2 philips head screwdriver and a 7/16" or adjustable wrench. Screw must engage the nylon insert in the locking nut.



Push bench down against boat with one hand and tighten each knob.

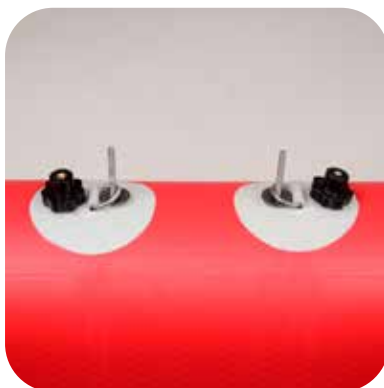

Locate seat hold down D-rings which are attached to sides of boat. Insert M6 x 50 screw with washer through each ring and fold ring flat with bolt pointing upward.

D-rings must be folded towards each other.



Slide seat onto seat release. When seat is fully pushed into seat release, the locking mechanism will pop down with a click.




To swivel the seat, pull locking bar forward then turn the seat.



To remove seat, lift the locking tab and slide seat out.



The FastCat12 has a large D-ring located under the front chamber. The D-ring can be used as an attachment point for a trailer winch or to hook up to a mooring.

 **Warning:** It is not recommended to tow the boat with this ring except at low speed situations.




To move the FastCat manually, use the included 66" paddle. When not in use, stow paddle on floor.



**Motor (OPTIONAL)**




Clamp electric motor or up to a 6hp gas motor to motor mount. Turn clamp screws until tight.

 **Warning:** Check motor clamp screws frequently, tighten if needed.



**Canopy (OPTIONAL)**

Canopy kit includes two curved bars, two side rods, canvas, two black knobs and two short (35mm) screws. Additional hardware may be included that is not for use on the FastCat.

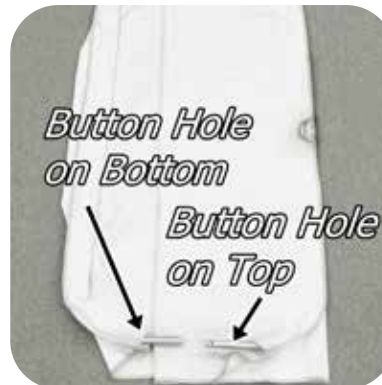

Layout canvas upside down (shiny side up).

Slide one curved bar into the canvas sleeve with locking holes up.

Slide the second bar into the other sleeve with locking holes facing down.



Fold the canvas in half so the shiny side is facing out and the bars are lying on top of each other.

Insert the side rods into the curved bars until the locking pins engage through the holes.



Place the canopy on the back of the boat with the short bars up.

Use the short screw and the knob to secure the rods to the black canopy pads on the boat.



Attach the rear clips to the small D-rings behind transom. Attach front straps behind the front carry handles. Adjust and tighten straps by sliding the buckles.



Canopy can be folded towards the back of the boat. Some rod holders may have to be turned for the canopy to clear them.



**Scotty® Deck Mounts (OPTIONAL):**



Attach deck mounts with 7/8" phil cap screws provided to the pad mounts near the transom. Screws are located in Orange Repair Kit.

Arrow points inboard.



**Don't stab the pad!**

Use **only** 1/4 - 20 x 7/8" screws provided in the orange repair kit. Longer screws, pointed screws, etc., will puncture the air chamber.

*Puncturing the air chamber in this manner is not covered under the warranty.*



**⚠ Caution:** Puncture hazard: do not thread screws into base without the Scotty Deck Mount.



To install a Scotty accessory in the mount, push stem into base until it clicks in.

Shown here is the Scotty® Baitcaster Rod Holder. Anchor Lock mount does not have button, it works by lining up a groove in the stem with a raised key in the base. Lift partially and turn Anchor Lock to swing anchor overboard. Large knob on side of Rod Holder is for adjusting rod angle.



## FastCat | ASSEMBLY & INFLATION



Attach Scotty rod mounts to the aluminum crossbenches with #6 x 1" truss head screws.

This one-time installation is easier done with a power drill with #2 phillips head tip. Leave the screws loose until the last hole then tighten all the screws.

## FastCat | DEFLATION



Remove transom, crossbenches, rod holders, and canopy. Rod holder bases remain in place. Place the boat bag under front of boat. Place bag so bottom panel is even with front end of boat and bag is 6 - 8" off center. Push air out.



To deflate, push down on the valve stem and quarter turn it to the right. The stem will stay in the down position, allowing the air to escape.

**⚠ Caution:** Air escapes with force, do not place face directly over valve.



As boat deflates, push it to one side. Push it so that it is even more off center of the bag. Push air out as you go.

## FastCat | DEFLATION



Fold one side onto the other, so it lands centered on the bag. Push more air out.



Push as much air out as possible before attempting to fold it in the rear to front direction.



Lift the back end of the boat so it folds between rod holder base and crossbench D-rings. Push more air out.



Lift the last section onto the front. Push remaining air out.



## FastCat | DEFLATION



Pull the bag end flaps onto bag. Run the straps through both metal rings. Then run the strap between the rings and pull tight.



Secure the bag with the straps. Run straps through both rings, and back through first ring.

## FastCat | CLEANING & PROTECTING

Dry after each use to avoid mold. **While washing or rinsing: close the valve and twist the cap on so water cannot not enter the chamber.** Sea Eagles can be cleaned very effectively with general purpose cleaning products and a scrub brush. Towel dry.

### Protection from the Sun and Heat

Avoid leaving the boat in direct sunlight when ashore. Temperatures on a beach, dock, davit, etc. can get very high, which could affect the vinyl or glue. Excessive exposure to sun and heat can cause your Sea Eagle to become sticky or cause the glue to fail.

Treat the boat with a UV protectant such as 303 Aerospace Protectant. Generally, protectants are a thin film of oil, which will help keep your Sea Eagle clean. Avoid applying protectant on the EVA pad or places where foot traction is needed. Treated boat will repel sand, water scum and tar stains.

## FastCat | STORAGE

If you're planning to leave your Sea Eagle outside, keep it raised off the ground and covered so it is not exposed to sunlight, rain, leaves, berries, bird droppings, etc.

**Storage Tips:** *"The best way to store a Sea Eagle is folded up in it's bag". - Cecil Hoge, Jr., Sea Eagle President*

- Check for water in the chambers. Water will leak out of open valves when it is rolled up.
- Water left inside can leak out and cause a lot of mold. Dry thoroughly to prevent mold.
- Rodent-proof the storage area. Mice, squirrels and other small rodents can do a lot of damage.
- Avoid excess heat. Do not store in direct sunlight, in an attic or a metal shed.
- In temperatures below freezing, do not drop, strike or unroll until it is brought to room temperature.
- It can be stored inflated. If hung, support it along its length.
- After storage, inspect for loose items, damage and leaks. Avoid excess heat. Do not store in direct sunlight, in an attic or a metal shed.

## FastCat | TROUBLE SHOOTING

If your Sea Eagle has lost pressure, it does not necessarily mean it is leaking. If it is inflated during the heat of the day and the temperature drops during the night it will be softer in the morning. If launching in very cold water, the air inside may contract and cause a loss of pressure. Add more air to restore to full pressure. If temperature is not a factor and your boat is losing air pressure, it's time to look for a leak.

### Step #1. LOOK

Visually inspect the boat close up and if necessary, flip it over and closely check the outside. Any large leaks when your boat loses a considerable amount of air should be clearly visible.

### Step #2. LISTEN

If you have a rough idea of where your leak is but can't see it, you may want to try listening for it as you may be able to hear the air escaping and pinpoint the leak.

### Step #3. TIGHTEN

Check the tightness of the one-way recessed valves as well and if necessary, tighten them with the valve wrench included in the repair kit canister.

## FastCat | TROUBLE SHOOTING

### Step #4. SOAPY WATER TEST

You'll need a bucket and liquid dish washing soap. Fill the bucket with clear water, and add a good squirt of soap (couple of tablespoons) to the water. Inflate the leaking chamber to full pressure. Spread lots of soapy water on the leaking chamber with a hand towel or large sponge. Don't assume the leak is coming from the valve or seams. The leak may produce bubbles, make hissing or sputtering noises, or spray water. Spray bottles are not effective at locating many leaks.



## FastCat | REPAIRS

Even though Sea Eagles are very rugged and tough, you may still experience the occasional puncture. Fortunately most repairs are fairly easy and only take a few minutes. For extensive repairs, please contact us directly to provide you with further assistance. The best way to do this is to e-mail us a digital photo of the area in question along with your hull identification number to [staff@seaeagle.com](mailto:staff@seaeagle.com).

You can also call us directly at **1-800-748-8066 ex. 314** and ask to speak with Technical Support for further assistance or a quote for having your boat mailed to our facilities for our professional repair services.

Sea Eagle repair fees start at \$75.00 and does not include return shipping charges. Please note that Sea Eagle does not service any other brand other than our own. All items sent to our repair facilities must have prior authorization in the form of a Return Authorization Number.



### Repair Kit

All Sea Eagles come standard with a repair kit which includes PVC patches and PVC glue. Repair kits also include a valve wrench.

## FastCat | REPAIRS

### PVC Based Glue

To patch your Sea Eagle, use an adhesive for PVC boats. Plumber's cement, epoxy, Flex Seal, water-pooling sprays and Gorilla Glue do not work.



### Pinholes

Deflate the boat and thoroughly clean and dry the area that is to be repaired. For small punctures less than 1/8" apply a small drop of glue and allow 24 hours to cure.



### Patching

The most common repairs are a puncture or small cut. A penny size patch is sufficient for repairs of this type.



Trace the outline of a penny on the patch material and on the boat. If a larger patch is needed, use a larger item as a template.



Cut patch along the outline with scissors.



Pro Tip: Trace the outline of the penny on masking tape and cut with a utility knife. Apply tape to the boat instead of tracing on the boat.



Apply glue to the patch and boat. Allow to dry 15 minutes. Glue must be dry to the touch. If glue layer is thin, apply second coat, allow to dry 15 minutes.



Apply patch to the boat. Smooth with finger or a smoothing tool such as a spoon, handle of a utility knife, or screwdriver. For best results, heat patch with a hair dryer 10-20 seconds and smooth with tool.

### Patching Tips:

- The chamber must be deflated or the air will force a path through the glue.
- Keep the patch size to a minimum, the bigger the patch, the harder it is to seal. The most common repair failures occur because the patch is too big.
- For repairs larger than a puncture, overlap the damage area by about 1/2" on each side.
- Do not apply the patch while the glue is wet.
- Covering a leaking patch with another patch rarely fixes the problem. To remove a patch, heat it with a hair dryer and peel it off.
- For field repairs, allow at least an hour to cure. Other repairs, allow to cure overnight.
- Patches can be removed by heating with a hairdryer.
- **Never** use a heat gun on your boat.
- Clamps and weights are not needed.

For a demonstration of good patching technique, please view the **How to Repair** video on the instruction page of our web site. There is a link at the bottom of every page at **SeaEagle.com** or type "instructions" into the search box.

### Contact Us

Unlike many other companies today we pride ourselves on answering the phone and helping you with any concerns, questions or special ordering needs that you may have! Feel free to give us a call at **1-800-748-8066** and we will be happy to talk with you! Our business hours are Monday to Friday from 9AM to 5PM, EST.

#### Sea Eagle Boats Inc.

19 N. Columbia Street, Suite 1  
Port Jefferson NY 11777  
1-800-748-8066  
*staff@seaeagle.com*



Sea Eagle offers a large array of accessories for your FastCat.



**Personal Flotation Devices (OPTIONAL)**  
U.S.C.G. approved. Life jackets, paddling vest, PFD Belts available in various sizes.



**Dry Bag (OPTIONAL)**  
5 liter bag keeps phone, keys, snacks and more dry.



**See-me Safety Light (OPTIONAL)**  
Coast Guard approved LED personal safety light emits a 360° light visible up to 3.4 miles. It also attaches to a PFD!



**BTP Turbo Electric Pump (OPTIONAL)**  
These electric pumps come with a nylon shoulder carry bag, 12V DC power cord, hose and pre-attached recessed valve adapter.



**EZ Cart Heavy Duty (OPTIONAL)**  
Transport your Boat from your car to the water and back with ease. Quickly assembles & disassembles.



**303 Protectant (OPTIONAL)**  
Extends the life of your Sea Eagle. Simply spray on every 30-45 days to improve resistance to UV, chemical & other types of harmful exposure.